



ARCHITECT SERIES


APPLICABLE TO OFFICE AND HOME LIGHTINGS.
EASY TO USE AND RELIABLE QUALITY.

Powered by



Intelligence
Inside

ARCHITECT

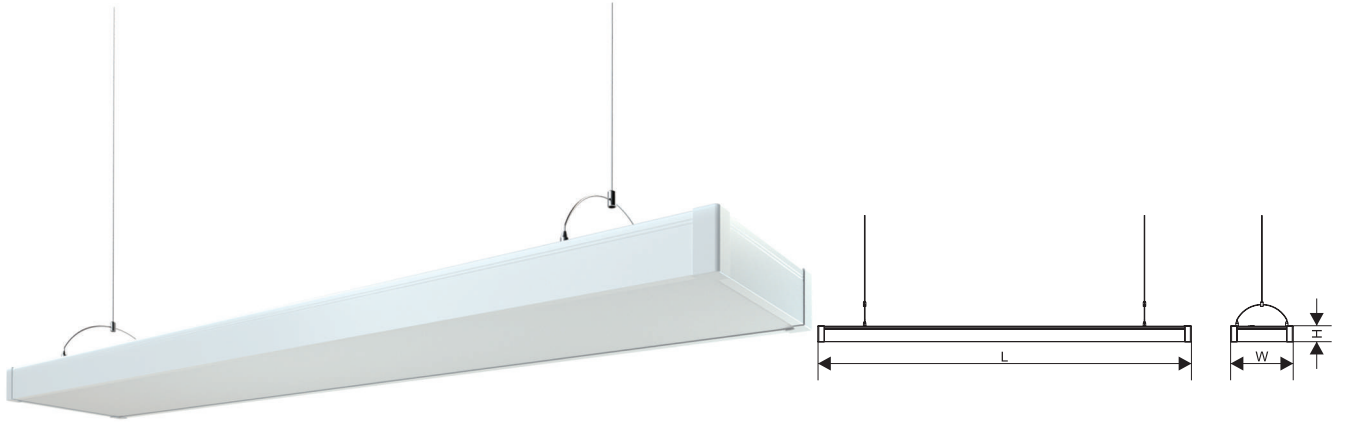


Parameters

Model	Power	Luminous Flux	Efficacy	Size
GT1215	36W	2880LM	80	1202*152*52mm
GT1220	36W	2880LM	80	1202*202*52mm
GT1230	48W	3840LM	80	1202*302*52mm
QT1215	36W	2880LM	80	1202*152*52mm
QT1220	36W	2880LM	80	1202*202*52mm
QT1230	48W	3840LM	80	1202*302*52mm
QT2020	48W	3840LM	80	2002*202*52mm

Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.9
 CCT: 4000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 120°
 Main Material: Aluminum+PS
 Body Color: Sand Black
 Input Cable: 0.5mm²
 Installation: N/A
 Protection: IP20
 Environment: -20°C ~ 50°C
 Longevity: 20000h
 Driver: 3AAA Constant Current

Packing

Model	Qty/CTN	Master CTN
GT1215	5	122*29*17cm
GT1220	5	122*29*22cm
GT1230	5	122*29*32cm
QT1215	5	122*29*17cm
QT1220	5	122*29*22cm
QT1230	5	122*29*32cm
QT2020	5	202*29*22cm



DETAILS



Customizable wide voltage driver / customizable color.
 High brightness, uniform light emission and soft light.